


- ✓ Designed for professional cleaning
- ✓ With fluid recovery system
- ✓ High durability
- ✓ Height-adjustable



TECHNICAL DATA

| | |
|--------------------|-------------------------------|
| Pressure | 350 / 500 bar |
| Temperature | 120°C |
| Inlet | G1/4" M G3/8" F G1/2" F |

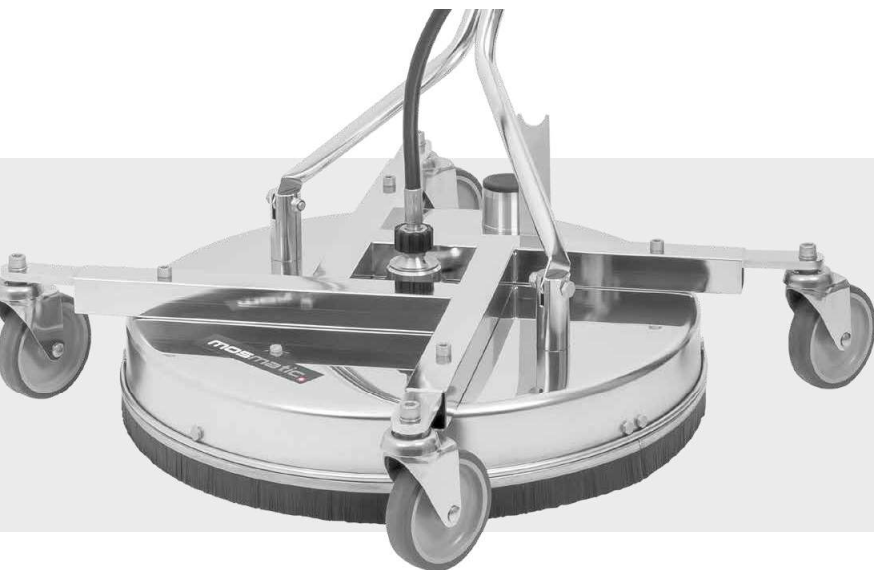

FL-AH 750



FL-AH 520




Optional protection plate
See accessories for HP Cleaner

FEATURES

Recovery System

Environmental protection is more important than ever, leading to the need to recycle waste water. The dual housing and vacuum port allow this function.



Residual water and debris can be recovered, recycled and reused.

Adjustable Height

Stainless steel frame for added stability. Height adjustable housing ensures the best cleaning results.



Stainless Steel Caster (Premium Quality)

Four 100 mm stainless steel casters with custom mounting brackets ensure easy maneuvering even in confined spaces.
Part No. 80.956

Rotor Arms

Can withstand up to 500 bar, and are precision welded and balanced.



2cp2 (2 Arms / 2 Nozzles)

Part No. 82.946 (ø470 mm), 1/8"
Part No. 82.941 (ø470 mm), 1/4"
Optional: Part No. 82.9069 (ø450 mm), 1/8"

3cp3 (3 Arms / 3 Nozzles)

Part No. 82.947 (ø700 mm), 1/8"

4p4 (4 Arms / 4 Nozzles)

Part No. 82.9133 (ø470/350 mm), 1/4"
Part No. 82.9108 (ø686/600 mm), 1/4"

Quality Swivel

High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



DYCI Swivel

Part No. 55.253

DXTI Swivel

Part No. 39.910

DYDI Swivel (500 bar)

Part No. 55.263

| Name | Part No. | ø | NW | Weight | Swivel | Rotor Arm | HP- Nozzles | HP- Gun | Stainless Steel Caster |
|---------------------|---------------|-----|----|---------|---------|--------------|----------------|------------|------------------------------|
| FL-AH 520 | 80.764 | 520 | 6 | 17.5 kg | 1x DYCI | 2x 1/8" NPTF | 2x 18.1503 | 1x | 4x ø100 |
| FL-AH 520* | 80.792 | 520 | 12 | 20.0 kg | 1x DXTI | 4x 1/4" NPTF | 4x 14.1503 | 1x | 4x ø100 |
| FL-AHY 520** | 80.188 | 520 | 6 | 17.0 kg | 1x DYDI | 2x 1/8" NPTF | -- | -- | 4x ø100 |
| FL-AH 750 | 80.765 | 750 | 6 | 23.5 kg | 1x DYCI | 3x 1/8" NPTF | 3x 18.1503 | 1x | 4x ø100 |
| FL-AH 750* | 80.793 | 750 | 12 | 26.0 kg | 1x DXTI | 4x 1/4" NPTF | 4x 14.1503 | 1x | 4x ø100 |
| FL-AHY 750** | 80.388 | 750 | 6 | 23.0 kg | 1x DYDI | 3x 1/8" NPTF | -- | -- | 4x ø100 |

* Inlet G1/2" F ** Pressure: 500 bar / Inlet G1/4" M