
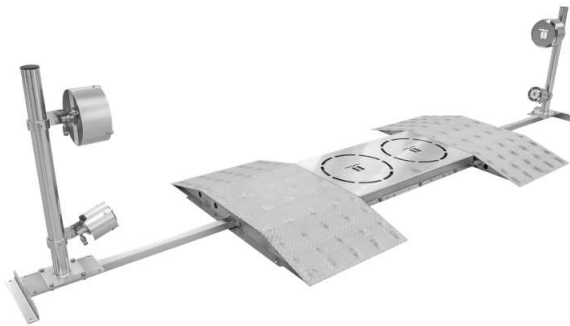


# UNDERCARRIAGE CLEANER WITH RAMP

- ✓ Mobile undercarriage cleaning
- ✓ Easy and fast assembly
- ✓ 100% stainless steel
- ✓ Only 120 mm in height

This undercarriage cleaner from Mosmatic is the first of its kind using patented technology and only 120mm in height. It will help prolong the life of your vehicles and fleets making them safer for service and maintenance. This all stainless constructed mat can easy be assembled with simple tools in minutes and can be anchored or mobile. Easily adapts to pressure washer pump systems from 22 l/min to 76 l/min, works with hot or cold water systems and chemicals from pH 3-12.

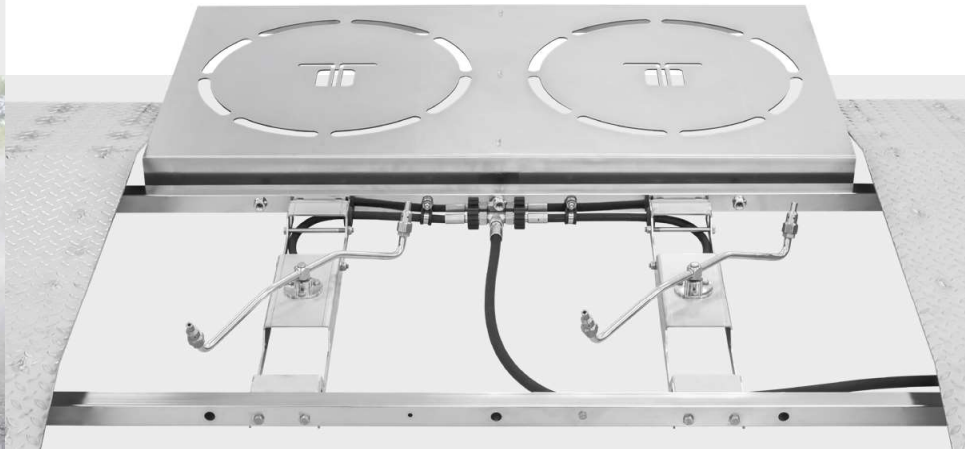

## Undercarriage Cleaner with Ramp

Name	Part No.	Piece	Length	Width	Height	Weight
<b>Undercarriage Cleaner with Ramp Set-up</b>	<b>80.501</b>	1x	1462	5018	120	232 kg

Includes:

<b>Ramp</b>	<b>80.503</b>	1x	1462	2684	120	170 kg	1
<b>Rigger</b>	<b>80.550</b>	2x	1215	400	65	9.5 kg	2
<b>Low Volume WBP140</b>	<b>84.584</b>	2x	---	---	---	3.5 kg	3
<b>Low Volume WBP250</b>	<b>84.594</b>	2x	---	---	---	4.8 kg	4
<b>Stand</b>	<b>903.986</b>	2x	1000	---	---	7.3 kg	5

Accessories:


<b>Extension</b>	<b>84.907</b>	2x	1000	---	---	6.0 kg	6
<b>Collision protection</b>	<b>905.884</b>	1x	870	152	102	8.0 kg	7
<b>High performance Pump</b>	<b>80.561</b>	1x	1130	800	2090	500 kg	8
<b>Hose kit</b>	<b>80.560</b>	1x	---	---	---	12.5 kg	

Consult your local laws for rules and regulations for wastewater runoff.


Our vehicles and fleets are valuable assets that are exposed to the influences of nature, chemicals and pollution. This leads to significant wear and tear on the chassis, wear parts and body. Keeping the undercarriage of your vehicle clean prevents rust and corrosion, reducing cost and prolonging component life.



Part No. 80.561 High performance Pump, information on request.

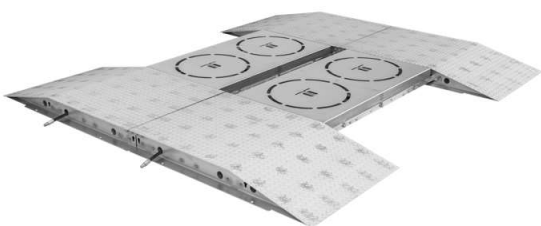

Part No. 80.513 Double ramp, information on request.

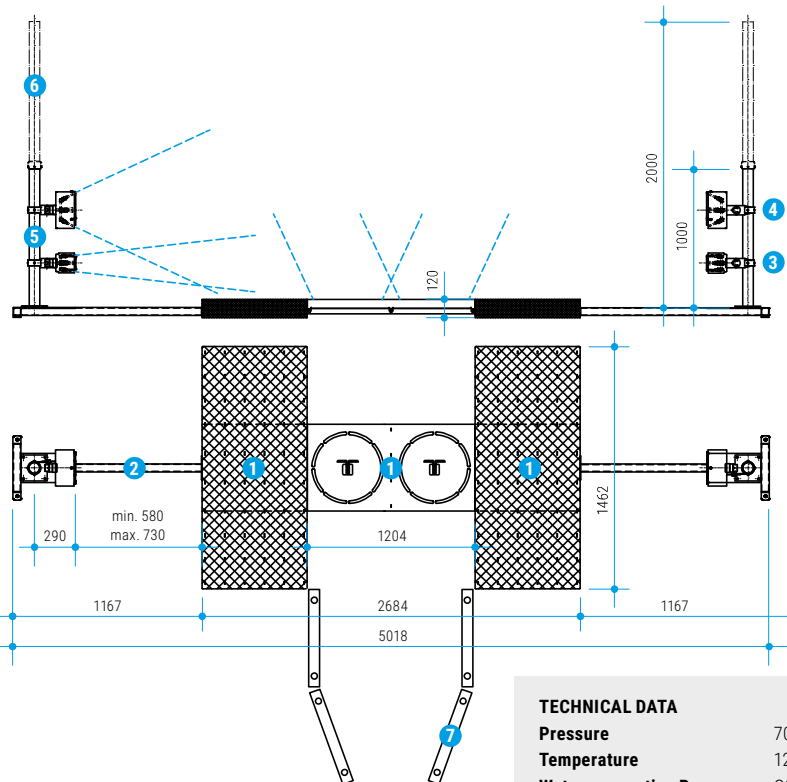

### TECHNICAL DATA

<b>Pressure</b>	70 bar (7 MPa)
<b>Temperature</b>	120°C
<b>Water connection Ramp</b>	G3/8" M
<b>Water connectiona WBP</b>	4x G3/8" F
<b>Throughput medium</b>	pH 3-12
<b>min. ground clearance</b>	122 mm

#### Legend

M.. = metric thrust, ..M = male, F = female, G = gas pipe thrust, R = gas pipe thrust conical, QV = quick connects, SV = profile ring fitting  
D = diameter, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position